


# CND 100

## CONVECTORS

PRODUCT-NO.: 234814

With this product, the warmth reaches you in more ways than one. Since two heating systems are integrated in this direct heating appliance, it not only radiates cosy warmth, but also convects it via the indoor air. As a result, you enjoy a pleasant and comfortable room temperature. The appliance's elegant design ensures that it blends in perfectly with your living environment.

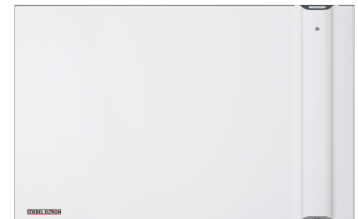

Easily set your preferred temperature on the appliance and benefit from greater savings: the wall mounted duo convector automatically lowers the temperature when you leave the room. If you open the windows to let fresh air in, the heater switches off automatically.

### The main features

Wall mounted duo convector – ideal as an auxiliary heater or interim heater in spring/autumn

---

Even, pleasant room air heating

---

Modern and high grade design

---

Operating controls with illuminated LCD screen

---

Weekly timer, frost protection and open window detection

---

Electronic control unit with presence detection

---

ON/OFF switch and overheating protection

---

Permanent connection with FIL control core



Type	CND 75	CND 100	CND 150
Part no.	234813	234814	234815

## Wärmeleistung

Rated heating output P <sub>nom</sub>	0.80 kW	1.00 kW	1.50 kW
Minimum heating output (standard value) P <sub>min</sub>	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P <sub>max,c</sub>	0.80 kW	1.00 kW	1.50 kW

## Hilfsstromverbrauch

Auxiliary power consumption with rated heating output el <sub>max</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption with minimum heating output el <sub>min</sub>	0.00 kW	0.00 kW	0.00 kW
Auxiliary power consumption in standby mode el <sub>SB</sub>	0.00 kW	0.00 kW	0.00 kW


## Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-	-	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-	-	-
Type of heating output/room temperature control: Room temperature control with mechanical thermostat	-	-	-
Type of heating output/room temperature control: With electronic room temperature control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control and time of day control	-	-	-
Type of heating output/room temperature control: Electronic room temperature control and day of week control	x	x	x

## Sonstige Regelungsoptionen

Other control options: Room temperature control with presence detection	x	x	x
Other control options: Room temperature control with window open detection	x	x	x
Other control options: With remote control option	-	-	-
Other control options: With adaptive control of heating startup	-	-	-
Other control options: With operating time limitation	-	-	-
Other control options: With black bulb sensor	-	-	-





Type	CND 200
Part no.	234816

## Wärmeleistung

Rated heating output P <sub>nom</sub>	2.00 kW
Minimum heating output (standard value) P <sub>min</sub>	0.00 kW
Maximum continuous heating output P <sub>max,c</sub>	2.00 kW

## Hilfsstromverbrauch

Auxiliary power consumption with rated heating output e <sub>lmax</sub>	0.00 kW
Auxiliary power consumption with minimum heating output e <sub>lmin</sub>	0.00 kW
Auxiliary power consumption in standby mode e <sub>ISB</sub>	0.00 kW

## Art der Wärmeleistung/Raumtemperaturkontrolle

Type of heating output/room temperature control: Single stage heating output, no room temperature control	-
Type of heating output/room temperature control: Two or more manually adjustable stages, no room temperature control	-
Type of heating output/room temperature control: Room temperature control with mechanical thermostat	-
Type of heating output/room temperature control: With electronic room temperature control	-
Type of heating output/room temperature control: Electronic room temperature control and time of day control	-
Type of heating output/room temperature control: Electronic room temperature control and day of week control	x

## Sonstige Regelungsoptionen

Other control options: Room temperature control with presence detection	x
Other control options: Room temperature control with window open detection	x
Other control options: With remote control option	-
Other control options: With adaptive control of heating startup	-
Other control options: With operating time limitation	-
Other control options: With black bulb sensor	-

Depth including wall mounting bracket

---

**Contact information**

Do you have additional questions? Then please do not hesitate to contact us, we would be only too happy to help:

Call 0151 436 96

Or send an e-mail to

[sales@stiebel-eltron.ie](mailto:sales@stiebel-eltron.ie)

Only a qualified contractor should carry out the installation, commissioning, maintenance and repair of this appliance. Where applicable and prior to installation the electricity and/or water utility companies should be notified of your intention to install the product.